


STEELMASTER 'RM' SERIES BENDING ROLLS

Single Pinch Pre-Bend Motorised Rolls.

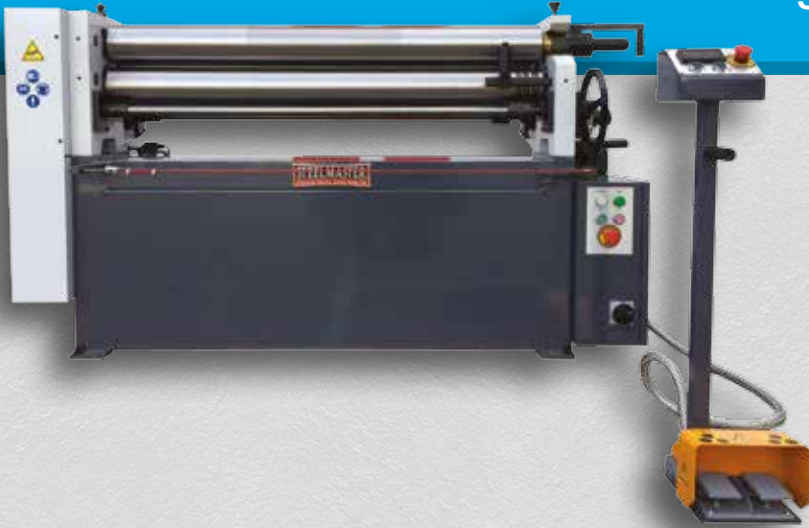

FEATURES

- motorised initial pinch roller
- rigid cast-iron main frames
- main motor with brake system
- open end top roll for swing away
- wire grooves standard
- high tensile strength steel rollers
- roving foot operation with e-stop
- supplied with cone rolling feature
- manufactured to CE standard

EQUIPMENT & ACCESSORIES SUPPLIED

Heavy duty foot switch and control buttons, cone rolling attachment, operation manual.

| TECHNICAL DATA | SKU | CAPACITY IN MILD STEEL | ROLL DIAMETER (TOP) | ROLL SPEED | MOTOR POWER | WEIGHT (NT) | DIMENSIONS (L X W X H) | PRICE |
|----------------|-------------|------------------------|---------------------|------------|-------------|-------------|------------------------|-------|
| (model) | (#) | (mm) | (mm) | (mpm) | (kw/V) | (kg) | (mm) | (AUD) |
| SM-RM1302 | 23-0410-DRO | 2.5 x 1300 | 90 | 6 | 1.5 / 415 | 470 | 1800 x 640 x 1200 | \$ |
| SM-RM1503 | 23-0402-DRO | 3.5 x 1500 | 120 | 6 | 2.5 / 415 | 780 | 2060 x 640 x 1050 | \$ |
| SM-RM2003 | 23-0411-DRO | 3.5 x 2070 | 127 | 6 | 4 / 415 | 1300 | 2820 x 1000 x 1450 | \$ |
| SM-RM1345 | 23-0438-DRO | 4.5 x 1300 | TBA | 6 | 4 / 415 | TBA | 1800 x 640 x 1200 | \$ |
| SM-RM1306 | 23-0419-DRO | 6.5 x 1300 | 150 | 6 | 4 / 415 | 1220 | 1900 x 800 x 1200 | \$ |

STEELMASTER 'IRM' SERIES BENDING ROLLS


Asymmetrical 3-Roll Bending Machine With Single Pinch Pre-Bend.

INITIAL PINCH TYPE



FEATURES

- all 3 rolls are hydraulically driven
- independently operated pinch roller
- digital L/R positioning of pinch roller
- rigid cast-iron main frames
- high grade hardened steel rollers
- main motor with brake system
- open end top roll for swing away
- wire grooves standard
- high tensile strength steel rollers
- cone rolling attachment fitted
- roving foot operation with e-stop
- manufactured to CE standard

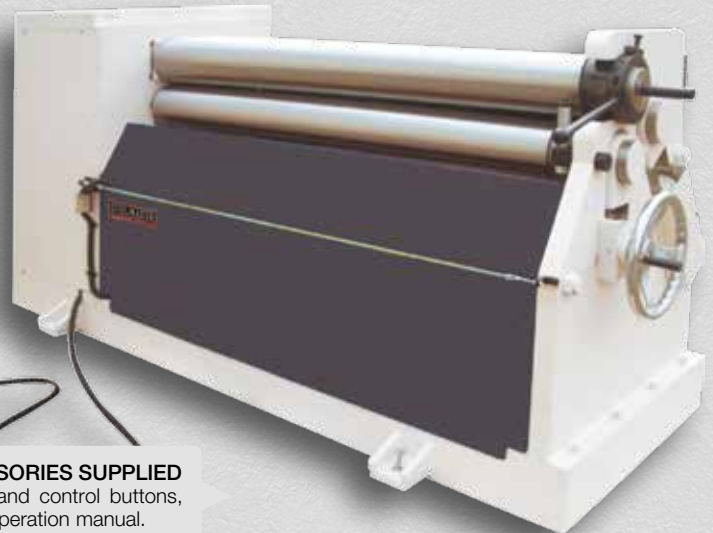

EQUIPMENT & ACCESSORIES SUPPLIED

Heavy duty foot switch and control buttons, digital read-out display, operation manual.

| TECHNICAL DATA | SKU | CAPACITY IN MILD STEEL | ROLL DIAMETER (TOP) | ROLL SPEED | MOTOR POWER | WEIGHT (NT) | DIMENSIONS (L X W X H) | PRICE |
|----------------|---------|------------------------|---------------------|------------|-------------|-------------|------------------------|-------|
| (model) | (#) | (mm) | (mm) | (mpm) | (kw/V) | (kg) | (mm) | (AUD) |
| SM-IRM1306 | 23-0418 | 6.5 x 1300 | 150 | 6 | 4 / 415 | 2100 | 2100 x 810 x 1400 | \$ |
| SM-IRM1506 | 23-0413 | 6.5 x 1550 | 180 | 5 | 4 / 415 | 3000 | 2490 x 890 x 1400 | \$ |
| SM-IRM2006 | 23-0414 | 6.5 x 2050 | 190 | 5 | 5 / 415 | 3300 | 3050 x 1000 x 1500 | \$ |

3 ph /415 volt machinery do not come fitted with plugs as standard. GST is NOT included in the listed prices



ASSET PLANT & MACHINERY PTY LTD
8 Capital Drive, Dandenong VIC 3175

Tel : (03) 8710-8088
Fax : (03) 8710-8044

Web : www.assetplant.com
Email : sales@assetplant.com