

ASSET INDUSTRIAL EURO BIG BORE LATHE


Heavy Duty Full Cast Large Bore Lathe 105mm and 560mm Swing.

UNIQUE FEATURES

"making ours unique!"



- 4 x Thread Types
- 2 Fixed Steadies
- Haas Type Tool Post
- Full Length Cast Base

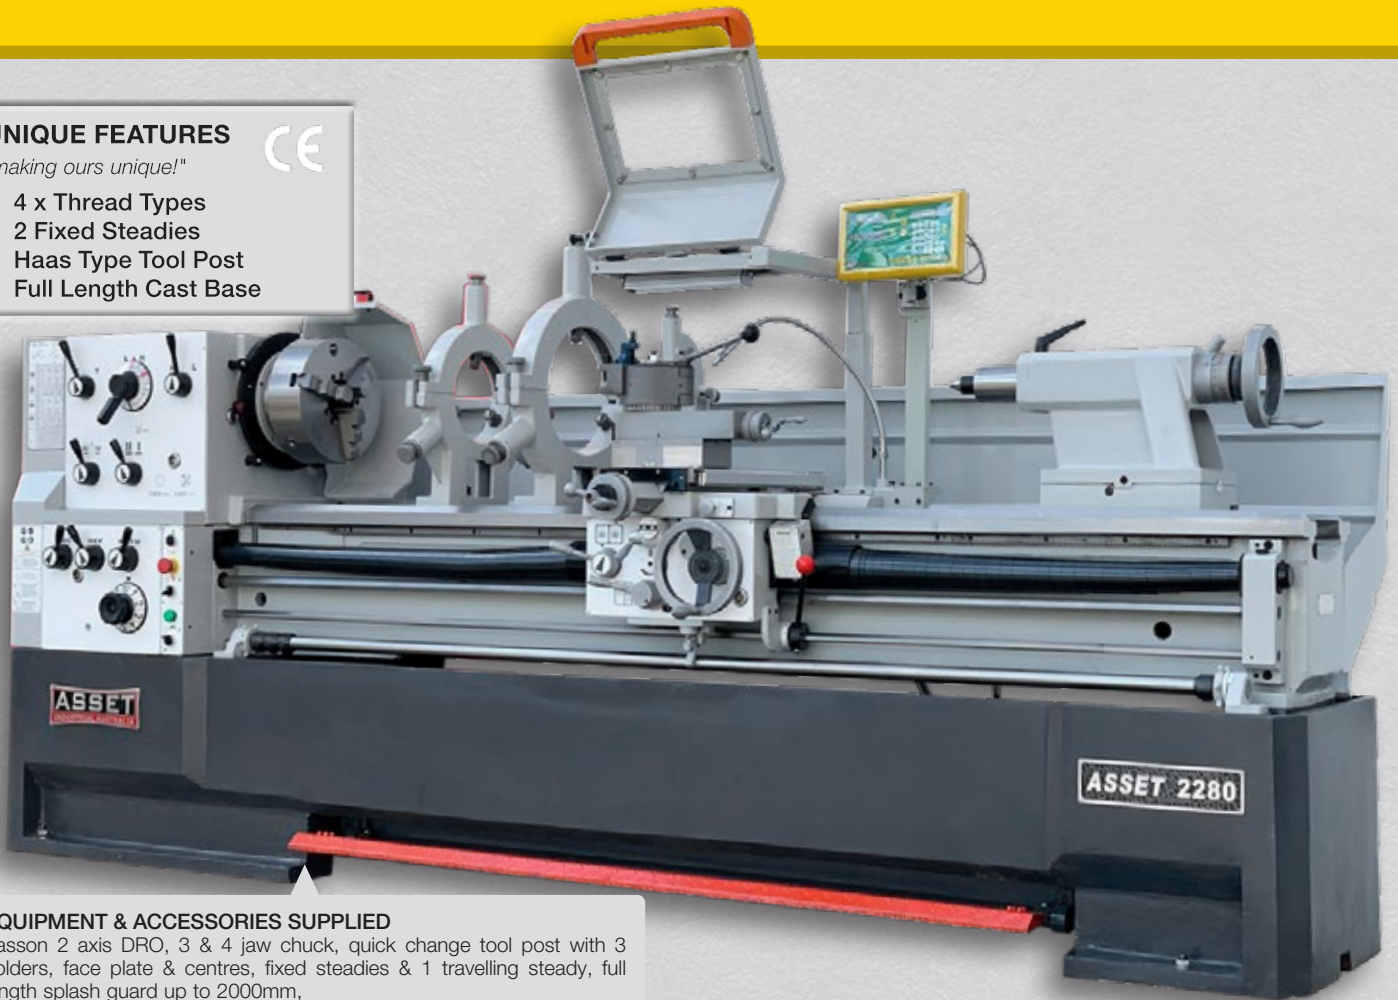

EQUIPMENT & ACCESSORIES SUPPLIED

Easson 2 axis DRO, 3 & 4 jaw chuck, quick change tool post with 3 holders, face plate & centres, fixed steadies & 1 travelling steady, full length splash guard up to 2000mm,

FEATURES

- large 105 mm spindle bore
- induction-hardened and ground cast iron bed and slide ways
- triple precision headstock bearings fitted
- spindle holding camlock system
- main spindle running in oil bath, hardened and ground with two adjustable precision taper rollerbearings ensures accuracy
- maximum accuracy and quiet operation, even at high speeds
- metric calibrations
- capable of turning over 200 different types of threads with a low speed of 25 rpm
- transversal adjustment of tailstock for taper cutting applications
- quick change tool post standard
- 2 axis DRO fitted as standard
- safety covered lead screw
- safety interlocks on chuck guard, gear box and foot brake
- 415v 3ph,
- CE compliant

TECHNICAL DATA

TECHNICAL DATA		ASSET-2280
sku	(#)	12-0216N
bed length	(mm)	2000
centre height	(mm)	230
swing over bed	(mm)	560
swing in gap	(mm)	785
swing over cross-slide	(mm)	355
bed width	(mm)	335
bed height	(mm)	800
spindle bore	(mm)	105
camlock system	(mm)	D1-8
spindle speeds	(mm)	25 ~ 1500 / 12
cross-slide travel	(mm)	316
compound slide travel	(mm)	140
3 jaw chuck size Ø	(mm)	320
4 jaw chuck size Ø	(mm)	400
metric threads	(mm)	0.2 ~ 14 / 47
imperial threads	(tpi)	2 ~ 112 / 60
cross feed	(mm/r)	0.027 ~ 1.07
tailstock quill taper	(mt)	5MT
headstock morse taper	(mt)	6
tools to suit	(mm)	25 & 32
motor power	(kw/V)	7.5 / 415
dimensions (l x w x h)	(mm)	3350x1200x1500
weight (nt)	(kg)	3300
PRICE	(AUD)	\$

3 ph /415 volt machinery do not come fitted with plugs as standard. GST is NOT included in the listed prices

